

## G80 Swivel Self Locking Hook Model No. 8-027N

### Main Features

- Ball bearing performs to fully swivel under load
- Design factor 4:1 proof tested and certified

### Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.



### Technical Data

| Product Code | Capacity (tonne) | For Grade 80 Chain | Dimensions (mm) |     |    |    |     |    |    | Net Weight (kg) |
|--------------|------------------|--------------------|-----------------|-----|----|----|-----|----|----|-----------------|
|              |                  |                    | A               | B   | D  | H  | K   | P  | T  |                 |
| 8-027N-06    | 1.12             | 6                  | 32              | 23  | 12 | 19 | 149 | 28 | 15 | 0.7             |
| 8-027N-07    | 2.0              | 7, 8               | 36              | 29  | 14 | 24 | 186 | 34 | 20 | 1.2             |
| 8-027N-10    | 3.15             | 10                 | 41              | 34  | 16 | 30 | 218 | 44 | 26 | 2.0             |
| 8-027N-13    | 5.3              | 13                 | 46              | 44  | 22 | 39 | 276 | 51 | 30 | 4.2             |
| 8-027N-16    | 8.0              | 16                 | 61              | 51  | 24 | 49 | 329 | 61 | 36 | 7.3             |
| 8-027N-20    | 12.5             | 18, 20             | 74              | 82  | 26 | 62 | 403 | 91 | 48 | 11.7            |
| 8-027N-22    | 15.0             | 22                 | 97              | 96  | 33 | 63 | 457 | 80 | 49 | 18.0            |
| 8-027N-26    | 21.2             | 26                 | 123             | 116 | 26 | 69 | 535 | 99 | 56 | 32.0            |

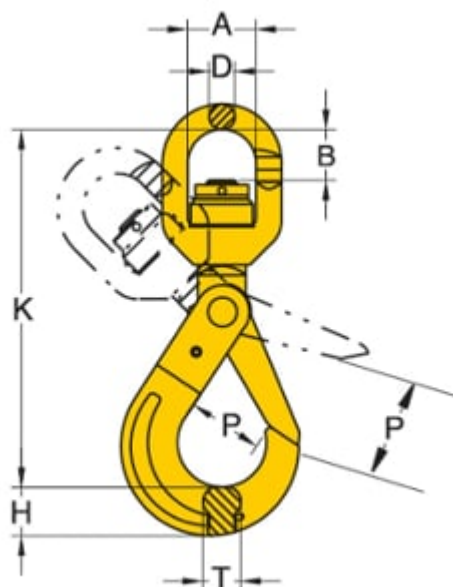

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice.