

Hack10 Eye Sling Hook

The Hack10 eye sling hook features a generous hook aperture and bowl, making it a versatile hook type suited for a variety of chain sling applications. This hook feature an eye attachment type, making it suitable for use in both chain and wire rope sling assemblies. Manufactured from alloy steel, the Hack10 eye sling hook is 25% stronger than a grade 8 equivalent, delivering a greater working load limit without the need for a larger diameter chain sling.

The Hack10 eye sling hook has been independently verified and awarded the DGUV Test H-Mark for lifting components, issued under number H83.

Standards: designed and manufactured in accordance with EN1677-1, ASTM A952/A952M, and DIN PAS 1061 and suitable for use in chain slings certified to EN818-4.

Third-party accreditation: DGUV Test H-Mark certified under number H83.


Product sizes: available for chain sizes from 8mm to 32mm and with working load limits from 2.5 tonnes to 40.0 tonnes.

Temperature: operational temperature range of - 40°C to + 200°C without reduction in working load limit.

Material: alloy steel.

Testing: crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

Safety factor: 4 : 1.

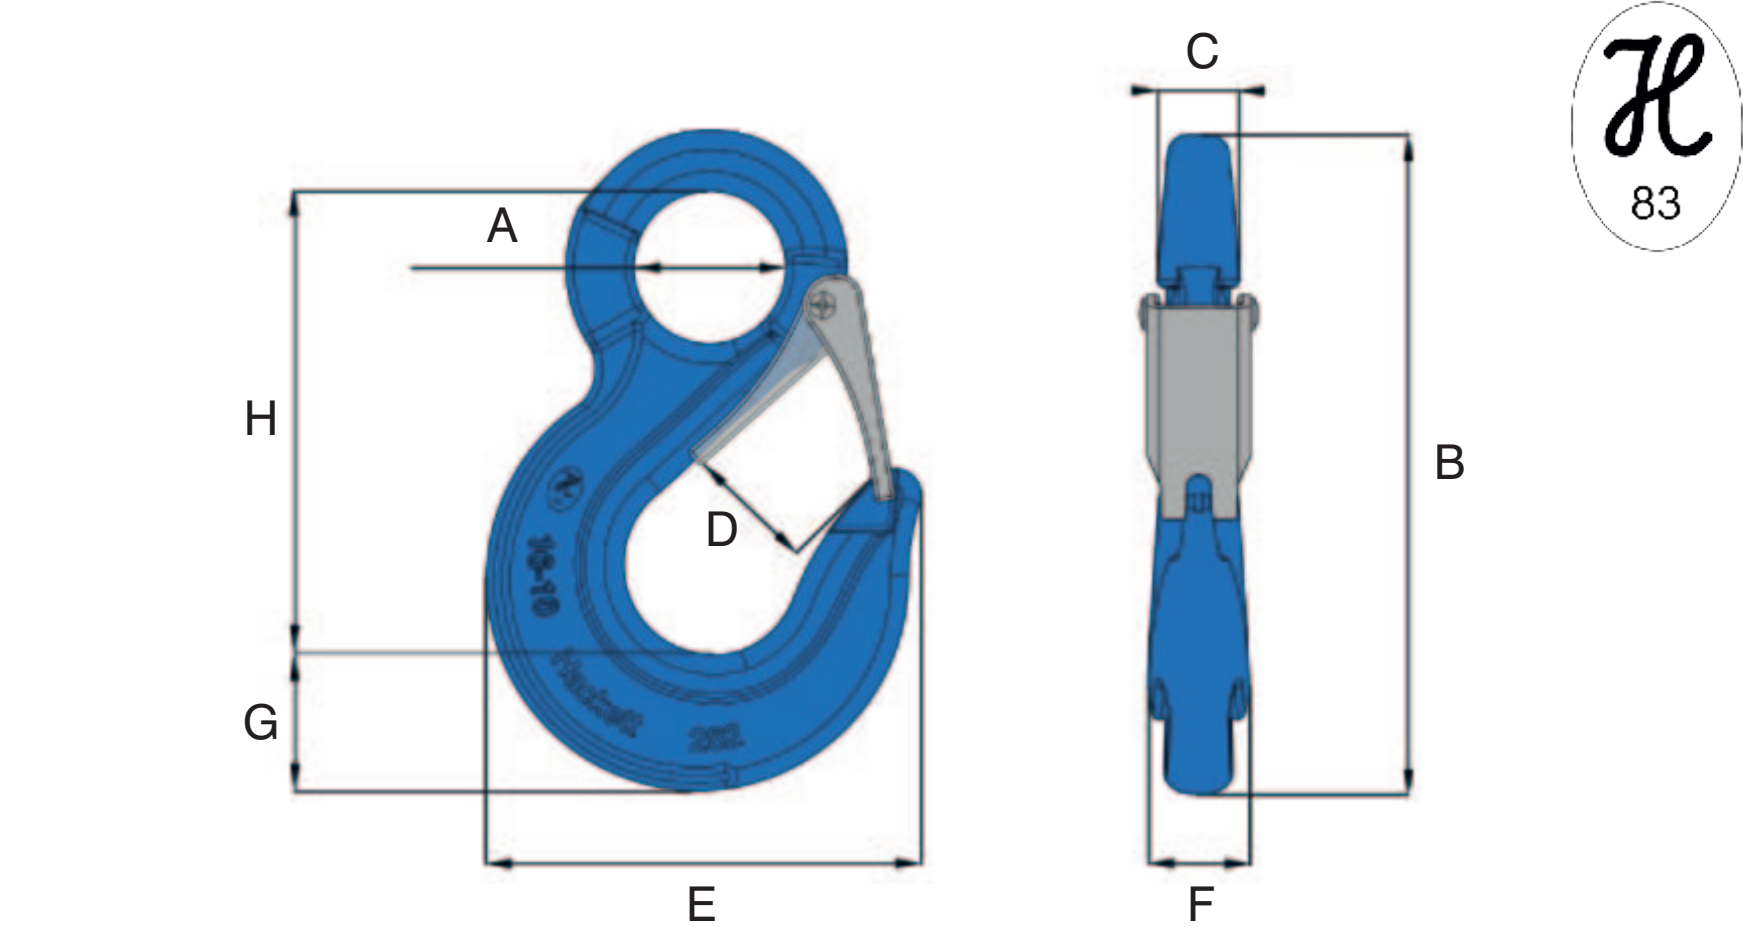

Metric Specifications

PART CODE	CHAIN SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	BOX QTY.	WLL tonnes	MASS kg
10-H15-08	8	26.0	144.0	16.0	27.0	86.0	24.0	25.0	108.0	25	2.5	0.66
10-H15-10	10	34.0	190.0	19.0	33.0	103.0	24.0	31.0	143.0	15	4.0	1.22
10-H15-13	13	42.0	227.0	23.0	40.0	135.0	38.0	39.0	172.0	9	6.7	2.43
10-H15-16	16	52.0	257.0	28.5	44.0	161.0	41.5	41.0	195.0	6	10.0	3.65
10-H15-20	20	55.0	298.0	27.0	50.0	190.0	48.0	56.0	215.0	2	16.0	6.20
10-H15-22	22	60.0	330.0	29.0	64.0	214.0	50.0	62.0	239.0	2	19.0	8.50
10-H15-26	26	70.0	376.0	35.0	70.0	245.0	60.0	75.0	265.0	2	26.5	13.60
10-H15-32	32	81.5	458.0	39.0	82.0	270.0	71.0	89.0	331.0	2	40.0	17.50