

Hack10 Reeveable Egg Link

The Hack10 reeveable egg link is specifically designed for use in Hackett grade 10 collar slings. The wide link aperture allows another reeveable egg link to pass through, creating a chokage lift. This link is capable of attachment directly onto chain thanks to its clevis attachment type. Manufactured from alloy steel, the Hack10 reeveable egg link is 25% stronger than a grade 8 equivalent, delivering a greater working load limit without the need for a larger diameter chain sling.

The Hack10 reeveable egg link has been independently verified and awarded the DGUV Test H-Mark for lifting components, issued under number H83.

- Standards:

designed and manufactured in accordance with EN1677-1, ASTM A952/A952M, and DIN PAS 1061 and suitable for use in chain slings certified to EN818-4.
- Third-party accreditation:

DGUV Test H-Mark certified under number H83.
- Product sizes:


available for chain sizes from 8mm to 16mm and with working load limits from 2.5 tonnes to 10.0 tonnes.
- Temperature:

operational temperature range of - 40°C to + 200°C without reduction in working load limit.
- Material:

alloy steel.
- Testing:

crack detection following heat treatment, and proof load tested to 2.5 times working load limit.
- Safety factor:

4 : 1.

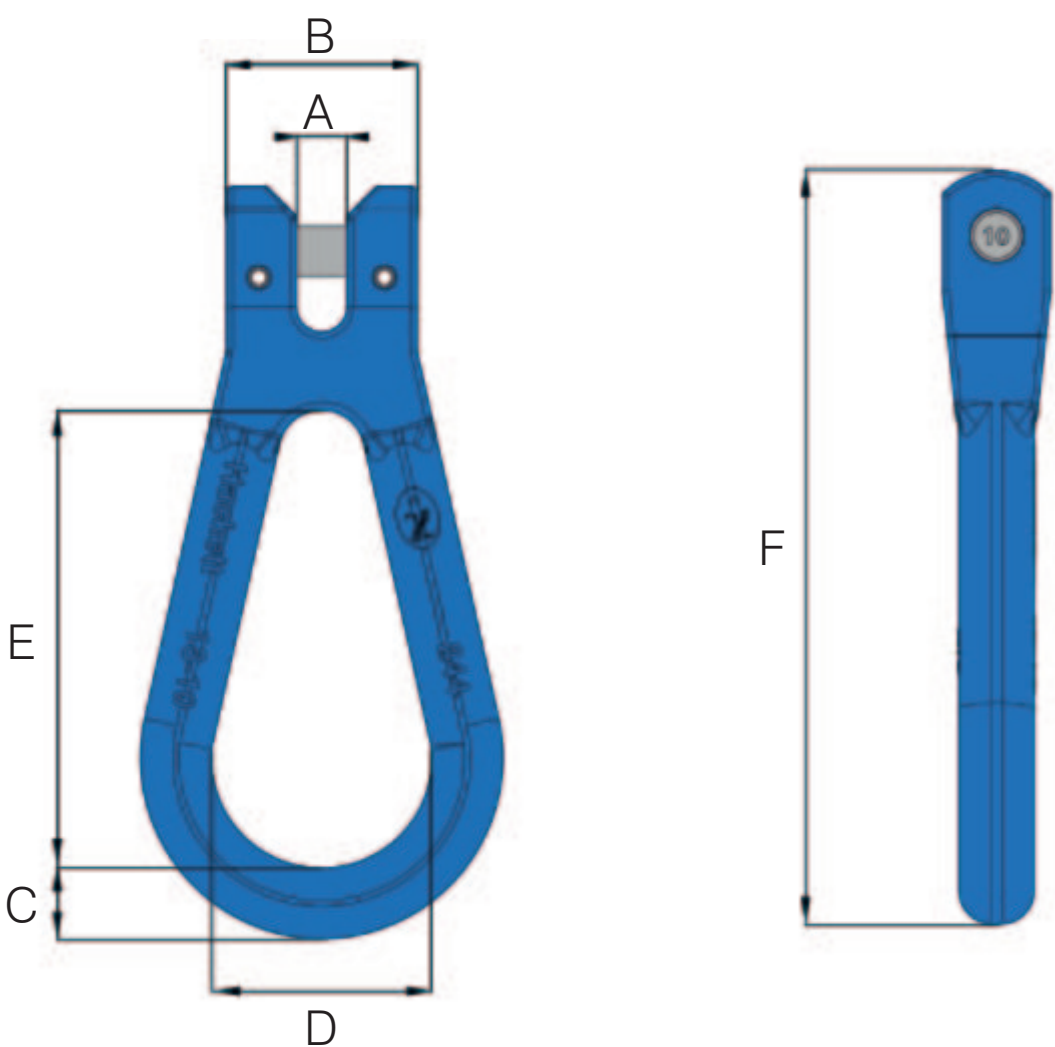

Metric Specifications

PART CODE	CHAIN SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	BOX QTY.	WLL tonnes	MASS kg
10-H07-08	8	10.0	32.8	15.0	87.0	111.0	139.0	40	2.5	0.53
10-H07-10	10	12.0	42.0	19.0	108.0	128.0	174.0	20	4.0	0.74
10-H07-13	13	16.5	58.0	22.0	137.5	177.0	228.0	10	6.7	1.76
10-H07-16	16	19.0	68.0	26.0	165.0	207.0	264.0	8	10.0	2.80