

Hack8 Clevis Shackle

The Hack8 clevis shackle is an incredibly versatile component suitable for a wide variety of lifting and general chain sling applications. This shackle is capable of attachment directly onto chain thanks to its clevis attachment type. Manufactured from alloy steel, the Hack8 clevis shackle delivers an excellent balance between toughness and ductility.

The Hack8 clevis shackle has been independently verified and awarded the DGUV Test H-Mark for lifting components, issued under number H83.

- Standards:

designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.
- Third-party accreditation:

DGUV Test H-Mark certified under number H83.
- Product sizes:


available for chain sizes from 7/8mm to 16mm and with working load limits from 2.0 tonnes to 8.0 tonnes.
- Temperature:

operational temperature range of - 40°C to + 200°C without reduction in working load limit.
- Material:

alloy steel.
- Testing:

crack detection following heat treatment, and proof load tested to 2.5 times working load limit.
- Safety factor:

4 : 1.

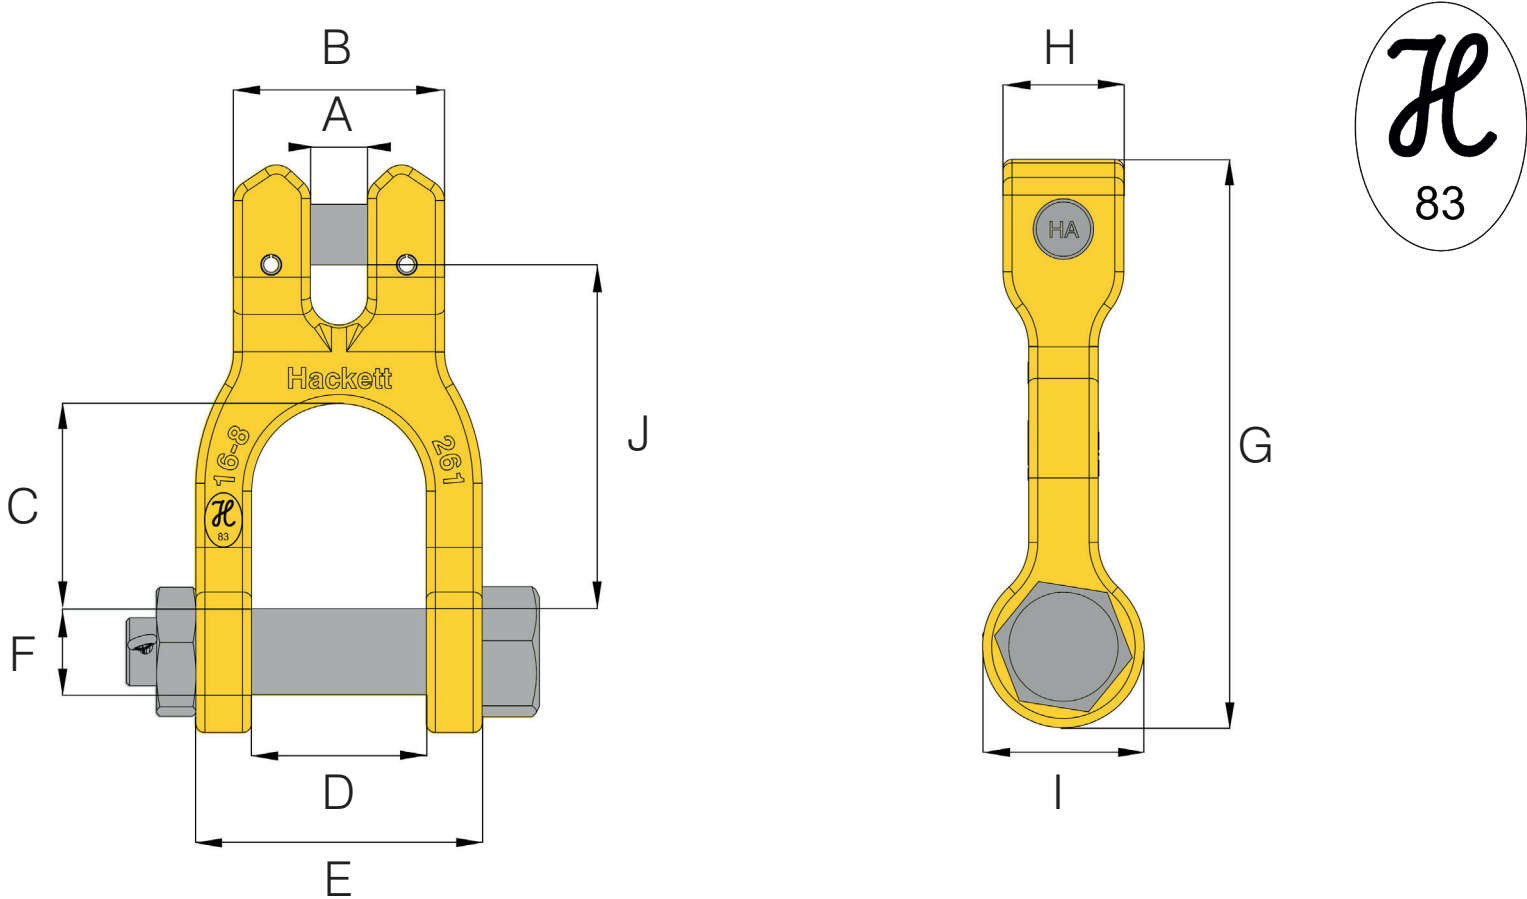

Metric Specifications

PART CODE	CHAIN SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	BOX QTY.	WLL tonnes	MASS kg
8-H16-08	7/8	9.0	36.0	36.3	31.0	51.0	16.0	103.5	20.0	34.0	62.0	35	2.00	0.40
8-H16-10	10	12.5	46.5	48.0	34.0	62.0	20.0	130.7	25.0	40.0	78.5	20	3.15	0.89
8-H16-13	13	15.0	59.0	64.0	49.0	83.0	22.0	160.0	31.0	43.0	98.5	18	5.30	1.51
8-H16-16	16	19.0	70.0	69.5	58.0	95.0	28.5	190.5	40.0	54.2	115.0	10	8.00	2.62

Hack8 Clevis Shackle

The Hack8 clevis shackle is an incredibly versatile component suitable for a wide variety of lifting and general chain sling applications. This shackle is capable of attachment directly onto chain thanks to its clevis attachment type. Manufactured from alloy steel, the Hack8 clevis shackle delivers an excellent balance between toughness and ductility.

The Hack8 clevis shackle has been independently verified and awarded the DGUV Test H-Mark for lifting components, issued under number H83.

- Standards:

designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.
- Third-party accreditation:

DGUV Test H-Mark certified under number H83.
- Product sizes:


available for chain sizes from 9/32 - 5/16 inch to 5/8 inch and with working load limits from 4,500 lbs to 18,100 lbs.
- Temperature:

operational temperature range of -40°F to +392°F (-40°C to + 200°C) without reduction in working load limit.
- Material:

alloy steel.
- Testing:

crack detection following heat treatment, and proof load tested to 2.5 times working load limit.
- Safety factor:

4 : 1.

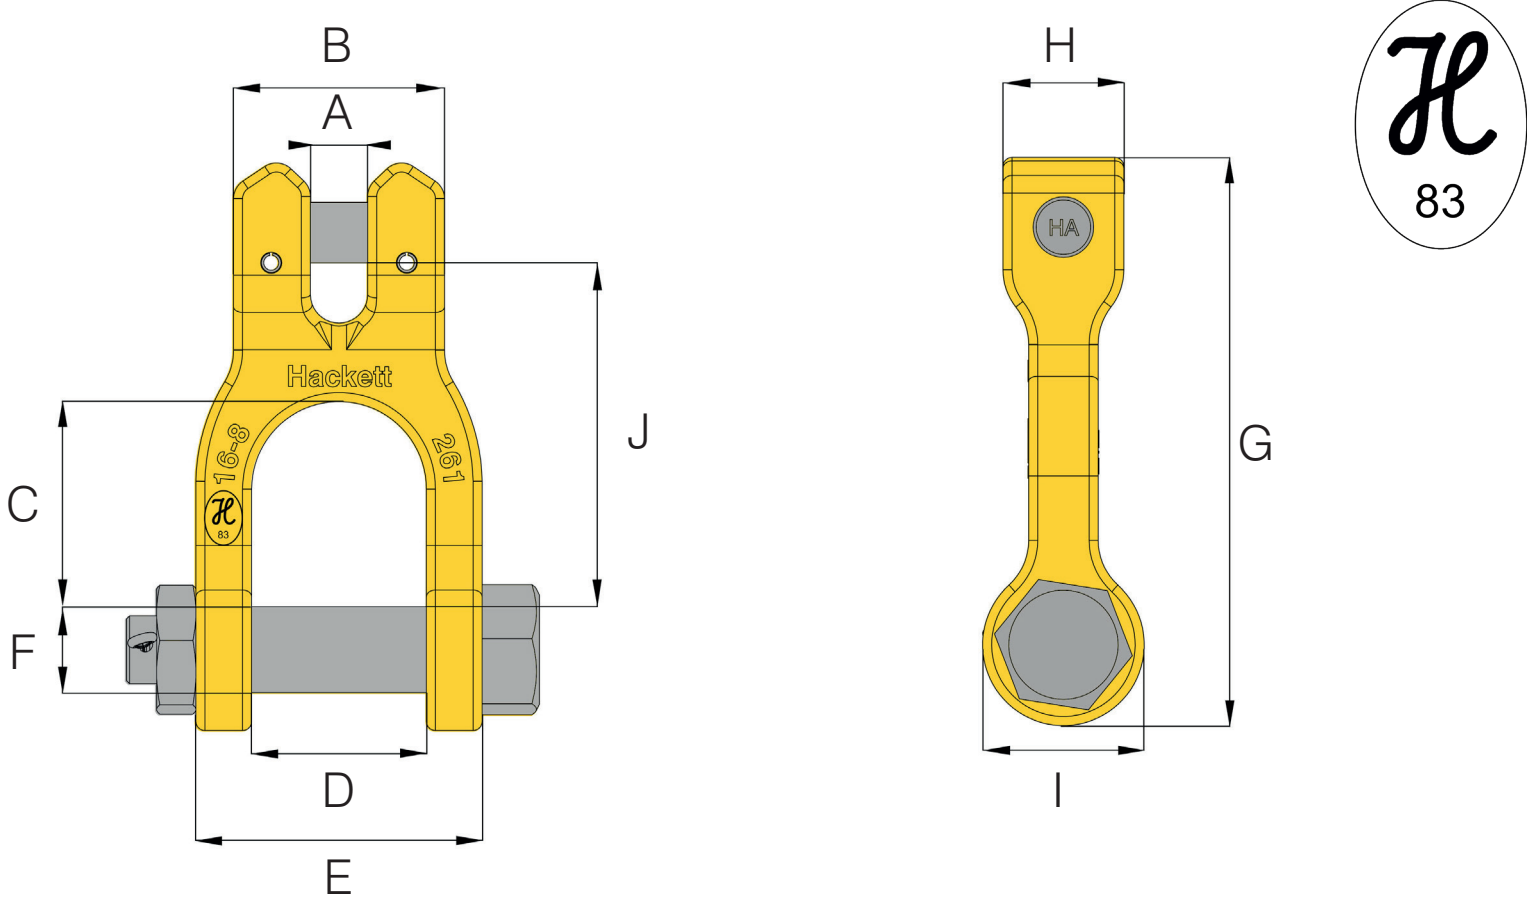

Imperial Specifications

PART CODE	CHAIN SIZE inch	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	I inch	J inch	BOX QTY.	WLL lbs	MASS lbs
8-H16-08	9/32 - 5/16	0.35	1.42	1.43	1.22	2.01	0.63	4.07	0.79	1.34	2.44	35	4500	0.88
8-H16-10	3/8	0.49	1.83	1.89	1.34	2.44	0.79	5.15	0.98	1.57	3.09	20	7100	1.96
8-H16-13	1/2	0.59	2.32	2.52	1.93	3.27	0.87	6.30	1.22	1.69	3.88	18	12000	3.33
8-H16-16	5/8	0.75	2.76	2.74	2.28	3.74	1.12	7.50	1.57	2.13	4.53	10	18100	5.78