

Hack8 Eye Sling Hook

The Hack8 eye sling hook features a generous hook aperture and bowl, making it a versatile hook type suited for a variety of chain sling applications. This hook features an eye attachment type, making it suitable for use in both chain and wire rope sling assemblies. Manufactured from alloy steel, the Hack8 eye sling hook delivers an excellent balance between toughness and ductility.

The Hack8 eye sling hook has been independently verified and awarded the DGUV Test H-Mark for lifting components, issued under number H83.

**Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.

**Third-party accreditation:** DGUV Test H-Mark certified under number H83.


**Product sizes:** available for chain sizes from 7/8mm to 32mm and with working load limits from 2.0 tonnes to 31.5 tonnes.

**Temperature:** operational temperature range of - 40°C to + 200°C without reduction in working load limit.

**Material:** alloy steel.

**Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

**Safety factor:** 4 : 1.

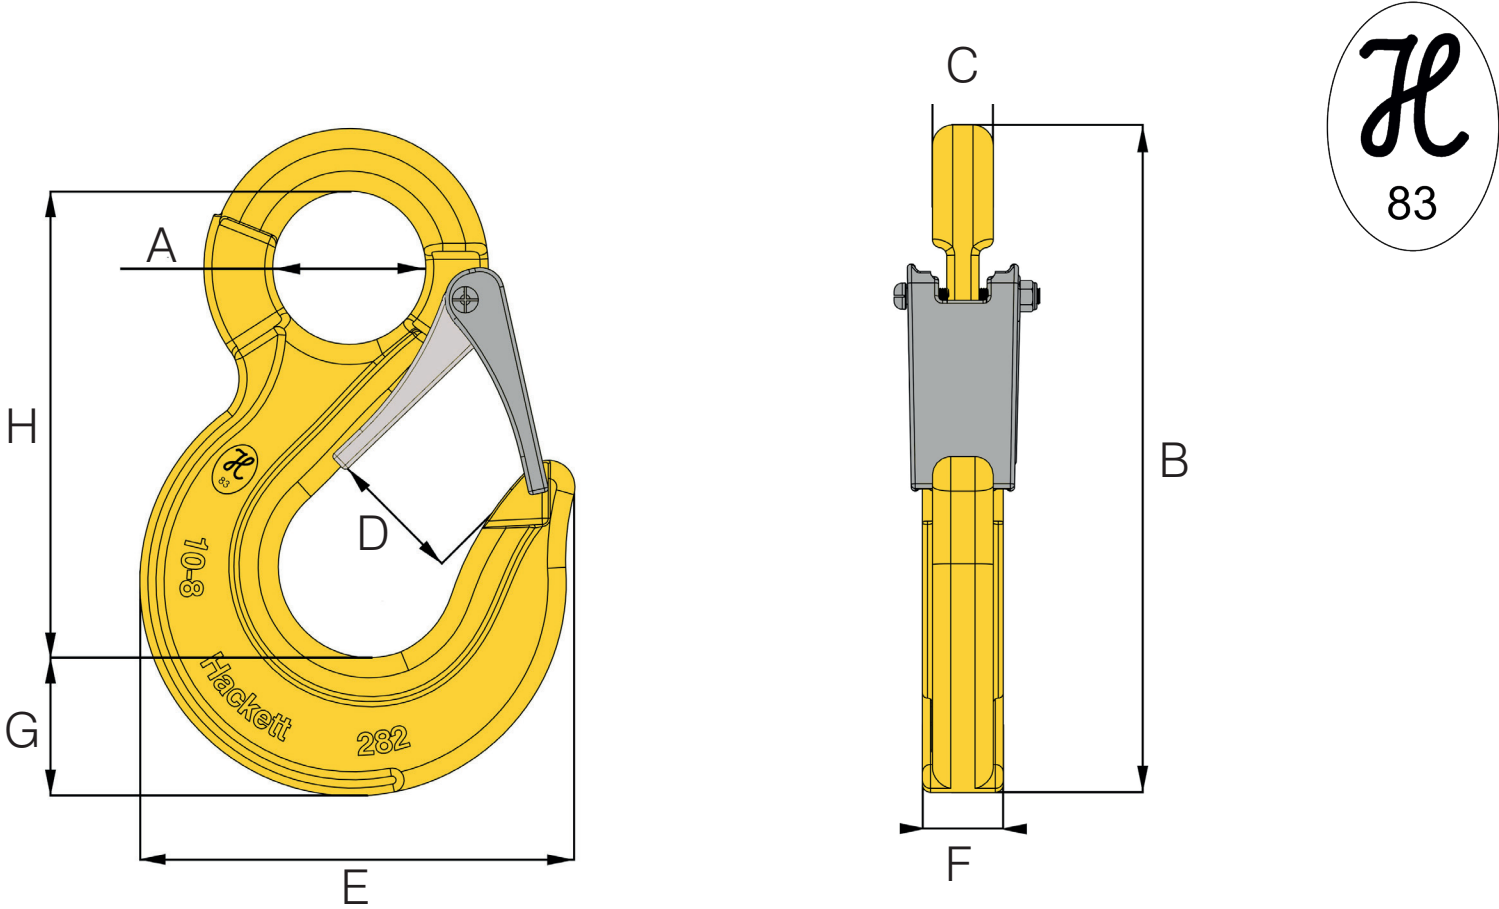

Metric Specifications

PART CODE	CHAIN SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	BOX QTY.	WLL tonnes	MASS kg
8-H15-08N	7/8	26.0	144.0	16.0	27.0	86.0	24.0	25.0	108.0	25	2.00	0.66
8-H15-10N	10	34.0	190.0	19.0	33.0	103.0	24.0	31.0	143.1	15	3.15	1.22
8-H15-13N	13	42.0	227.0	23.0	40.0	135.0	38.0	39.0	172.0	9	5.30	2.43
8-H15-16N	16	52.0	257.0	28.5	44.0	161.0	41.5	41.0	195.0	6	8.00	3.65
8-H15-20N	20	60.0	301.0	27.0	53.0	187.0	46.0	54.0	225.0	2	12.50	6.20
8-H15-22N	22	52.0	337.0	32.0	72.0	240.0	57.0	63.0	245.0	2	15.00	8.70
8-H15-26	26	64.0	395.0	35.0	82.0	260.0	60.0	81.0	279.0	2	21.20	13.10
8-H15-32	32	88.0	480.0	37.0	100.0	313.0	66.0	88.0	355.0	2	31.50	20.00

Hack8 Eye Sling Hook

The Hack8 eye sling hook features a generous hook aperture and bowl, making it a versatile hook type suited for a variety of chain sling applications. This hook features an eye attachment type, making it suitable for use in both chain and wire rope sling assemblies. Manufactured from alloy steel, the Hack8 eye sling hook delivers an excellent balance between toughness and ductility.

The Hack8 eye sling hook has been independently verified and awarded the DGUV Test H-Mark for lifting components, issued under number H83.

**Standards:** designed and manufactured in accordance with EN1677-1 and suitable for use in chain slings certified to EN818-4.

**Third-party accreditation:** DGUV Test H-Mark certified under number H83.


**Product sizes:** available for chain sizes from 9/32 - 5/16 inch to 1-1/4 inch and with working load limits from 4,500 lbs to 72,300 lbs.

**Temperature:** operational temperature range of -40°F to +392°F (-40°C to + 200°C) without reduction in working load limit.

**Material:** alloy steel.

**Testing:** crack detection following heat treatment, and proof load tested to 2.5 times working load limit.

**Safety factor:** 4 : 1.

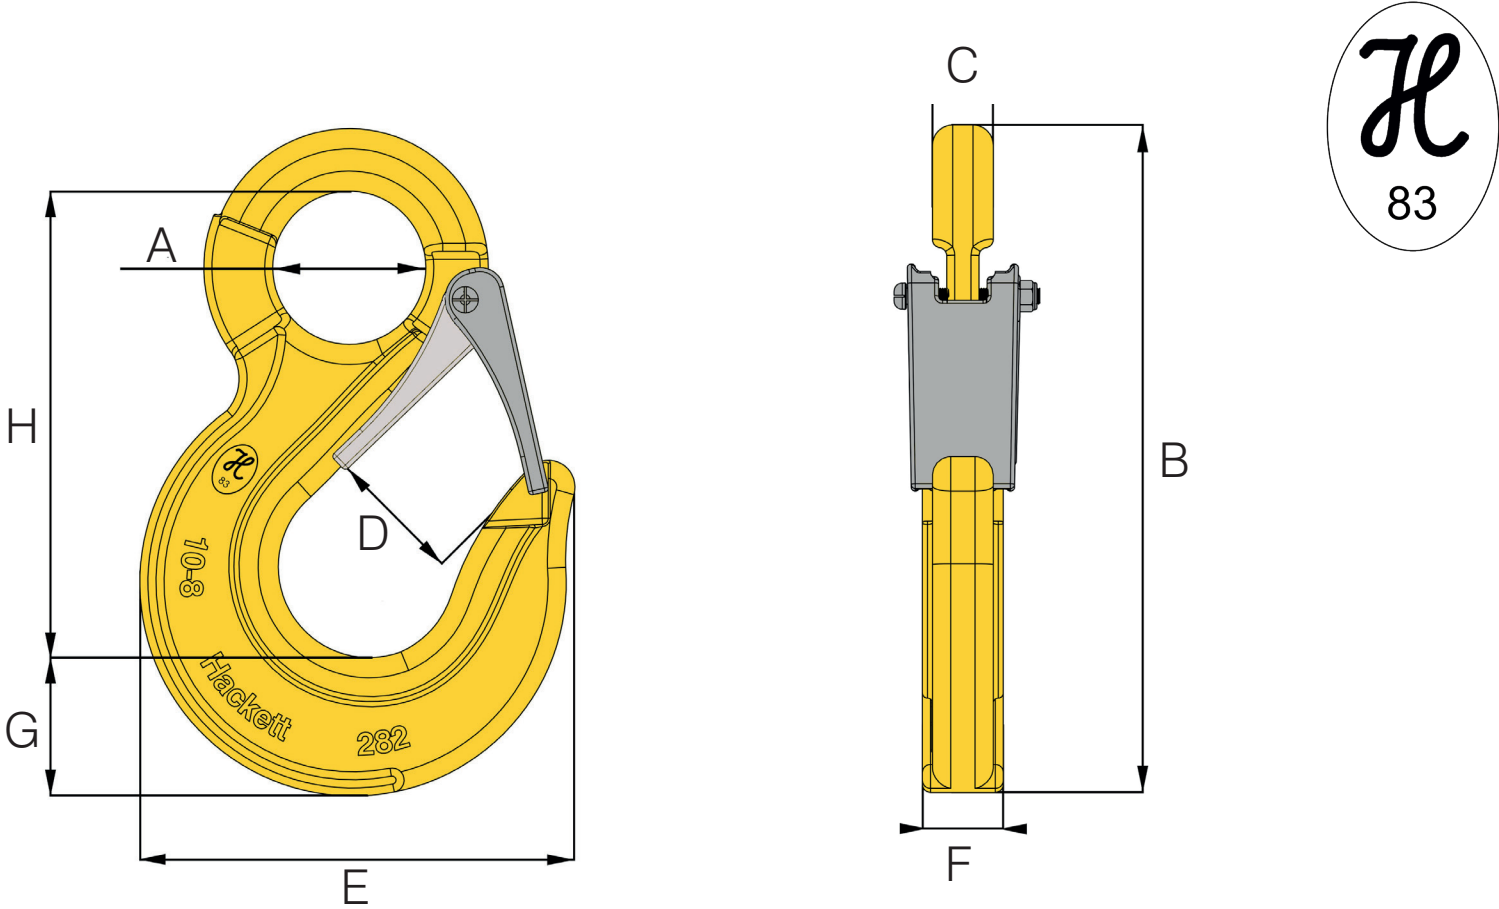

Imperial Specifications

PART CODE	CHAIN SIZE inch	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	BOX QTY.	WLL lbs	MASS lbs
8-H15-08N	9/32 - 5/16	1.02	5.67	0.63	1.06	3.39	0.94	0.98	4.25	25	4500	1.46
8-H15-10N	3/8	1.34	7.48	0.75	1.30	4.06	0.94	1.22	5.63	15	7100	2.69
8-H15-13N	1/2	1.65	8.94	0.91	1.57	5.31	1.50	1.54	6.77	9	12000	5.36
8-H15-16N	5/8	2.05	10.12	1.12	1.73	6.34	1.63	1.61	7.68	6	18100	8.05
8-H15-20N	3/4	2.36	11.85	1.06	2.09	7.36	1.81	2.13	8.86	2	28300	13.67
8-H15-22N	7/8	2.05	13.27	1.26	2.83	9.45	2.24	2.48	9.65	2	34200	19.18
8-H15-26	1	2.52	15.55	1.38	3.23	10.24	2.36	3.19	10.98	2	47700	28.88
8-H15-32	1-1/4	3.46	18.90	1.46	3.94	12.32	2.60	3.46	13.98	2	72300	44.09